

00 000
 000 000 0000



	00000
	0 C° to 70 C°
	00 0000

00 00 0 00

000 000 000 00 000 000 00 00 0000 00 0 0000.

0000 00 0 0000 000 00 00 0 00 00 0 00 00000, 00 000 000 00 0 00 000 000. 00 0000 KEL 0000

00 0000 KEL-DPZ 0000 00 0000, 000 0000 00 000000 0000.

000 0000 000 0000 00 0 000 00 00 000 A 0000 00 0 0000. (0000 99142)

0000 000 00000 00 000 00 00 000 B 00(0000 99200) 0 00 0 0000. 00 0000 M5 DIN 912 0000 00

0000 000 00 0 00 00 000 00 00 000 B 000(0000 99200) 00 00 000 C(0000 99201)0 0000 00 0 00 912 000 00 00000.

00 0 00

- 00 KEL / KEL-DPZ 00 000 000 00 0000 00 0 0000
- 00 000 000 0 0000
- 0000 0000 00 000000

00 000 A



EAN

00 000 00
 00 :

99142

100
4 mm

A
KEL-ER / KEL-U /
KEL / KEL-QUICK /
KEL 183 / KEL-FL

□□ □□ **B**




EAN

99200
4251269324208
40
3 mm

□□ □□□ □□
□□ :

B
KEL-ER / KEL-U /
KEL / KEL-QUICK /
KEL 183 / KEL-FL
/ KEL-DPZ

□□ □□ **C**

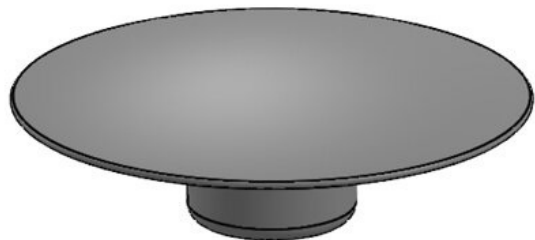

EAN

99201
4251269324215
40
3 mm
□□(RAL 7035□ □□)
C
KEL-DPZ

□□ □□□ □□
□□ :