



IP67

RoHS
compliant



Made in
Germany



IK07

IK08

Specifikationer

IP-Klass (EN 60529)	IP67
Protection class	III (Protective extra-low voltage)
Material	Tube: Polycarbonate Ändkapslar: Rostfritt stål
Brandklass	
Temperatur	-20 C° till 50 C°
Monteringstyp	Snap-in


Fördelar

Produkttyper och storlekar

	ArtNr.	81502	End cap	28 mm
	EAN	4251269333	diameter	
		132	Connection	M12
	Antal	1	possibilities	connector
	Längd	296,1 mm	Plugg typ	M12 flange
	Höjd	36 mm		socket
	Bredd	34 mm	Rated power	8 W
	Tube diameter	24 mm	Operating voltage	24 V, DC
			Service life	±5%
			Energy efficiency class	50.000 h
				E
				Consumption
				13 kWh/1000 h
				Colour
				5.600 K
				temperature
				Colour
				>80
				rendering
				index CRI
				Luminous flux
				1.000 lm
				Material tube
				Polycarbonat
				e



ArtNr.	81500	End cap	28 mm
EAN	4251269333	diameter	
	118	Connection	M12
Antal	1	possibilities	connector
Längd	565,1 mm	Plugg typ	M12 flange
Höjd	36 mm		socket
Bredd	34 mm	Rated power	13 W
Tube diameter	24 mm	Operating	24 V, DC
		voltage	±5%
		Service life	50.000 h
		Energy	E
		efficiency class	
		Consumption	13
		kWh/1000 h	
		Colour	5.600 K
		temperature	
		Colour	>80
		rendering	
		index CRI	
		Luminous flux	1.700 lm
		Material tube	Polycarbonate

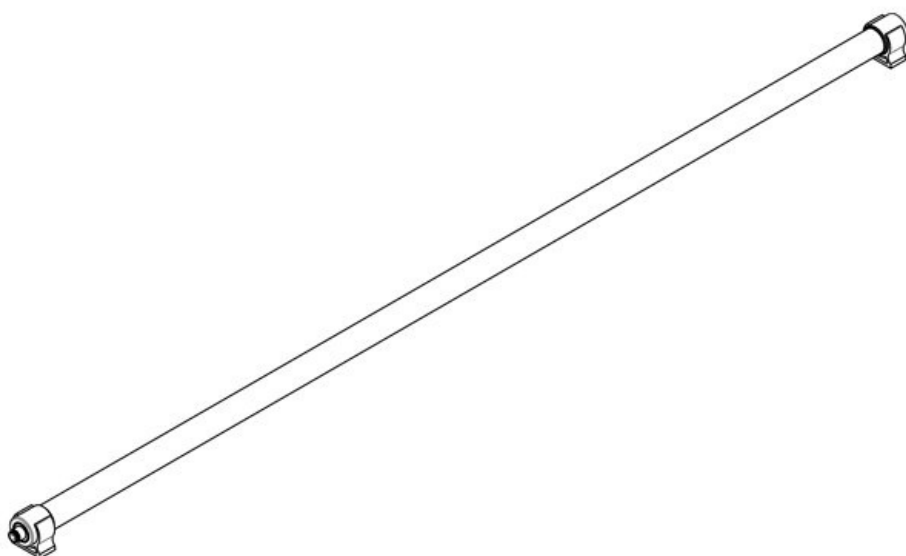

ArtNr.	81501	End cap	28 mm
EAN	4251269333	diameter	
	125	Connection	M12
Antal	1	possibilities	connector
Längd	1.074,6 mm	Plugg typ	M12 flange
Höjd	39 mm		socket
Bredd	30,4 mm	Rated power	26 W
Tube diameter	24 mm	Operating	24 V, DC
		voltage	±5%
		Rated current	1,0 A
		Service life	50.000 h
		Energy	E
		efficiency class	
		Consumption	13
		kWh/1000 h	
		Colour	5.600 K
		temperature	
		Colour	>80
		rendering	
		index CRI	
		Luminous flux	3.400 lm
		Material tube	Polycarbonate

ArtNr.	81530	Material cable	Polyurethane
EAN	4251269333163	sheath	e
Antal	1		
Length connecting cable	5.000 mm		
Plugg typ	M12 connector, Ferrules		
Operating voltage	24 V DC ±5%		
Färg	svart		



ArtNr.	81531	Material cable	Polyurethane
EAN	4251269333170	sheath	e
Antal	1		
Length connecting cable	10.000 mm		
Plugg typ	M12 connector, Ferrules		
Operating voltage	24 V DC ±5%		
Färg	svart		





ArtNr.	91443	Antal skruvhål	1
EAN	4251269335	Skruvhålets	6,5 mm
	082	diameter	
Antal	2		
Längd	30 mm		
Höjd	38 mm		
Bredd	27 mm		
Färg	svart		



ArtNr.	91070	Färg	svart
EAN		Antal skruvhål	1
Antal	1	Skruvhålets	4,2 mm
Längd	18,4 mm	diameter	
Höjd	34 mm		
Bredd	34 mm		
End cap	28 mm		
diameter			